


# Bosch GAL1230CV, 2 607 226 101, FRV03, 1607501920-C

Resistors		
	Value	Case
R1	680k, 1%	TH 2.4x6.3mm
R2	NTC 15D-7	ø7 mm
R3	180k, 5%	TH 3.2x9mm
R4	150R, 1%	TH 2.4x6.3mm
R5	30R, 1%	TH 2.4x6.3mm
R6	27k, 1%	TH 2.4x6.3mm
R7	2k7, 1%	TH 2.4x6.3mm
R8	10k, 1%	TH 2.4x6.3mm
R9	10k, 1%	TH 2.4x6.3mm
R10	3k6, 1%	TH 2.4x6.3mm
R11	4R7, 1%	TH 2.4x6.3mm
R12	27k, 1%	TH 2.4x6.3mm
R13	357k, 1%	TH 2.4x6.3mm
R14	4R7, 1%	TH 2.4x6.3mm
R15	0R22, 1%	TH 2.4x6.3mm
R16	10R, 1%	TH 2.4x6.3mm
R17	10R, 1%	TH 2.4x6.3mm
R18	680R, 1%	TH 2.4x6.3mm
R19	1k, 1%	TH 2.4x6.3mm
R20	270k, 1%	TH 2.4x6.3mm
R21	0R22, 1%	TH 2.4x6.3mm
R22	0R22, 1%	TH 2.4x6.3mm
R23	0R22, 1%	TH 2.4x6.3mm
R24	1k, 1%	TH 2.4x6.3mm
R25	10k, 1%	TH 2.4x6.3mm
R26	2k, 1%	TH 2.4x6.3mm
R27	2k, 1%	TH 2.4x6.3mm
R28	1k, 1%	TH 2.4x6.3mm
R29	10k, 1%	TH 2.4x6.3mm
R30	10k, 1%	TH 2.4x6.3mm
R31	1k, 1%	TH 2.4x6.3mm
R32	24k, 1%	TH 2.4x6.3mm
R33	20k1, 0.5%	TH 2.4x6.3mm
R34	160k, 0.5%	TH 2.4x6.3mm
R35	5k11, 0.5%	TH 2.4x6.3mm
R36	1k, 1%	TH 2.4x6.3mm
R37	20k, 1%	TH 2.4x6.3mm
R38	10k, 1%	TH 2.4x6.3mm
R39	10k, 1%	TH 2.4x6.3mm
R40	2k7k, 1%	TH 2.4x6.3mm
R41	20k, 0.5%	TH 2.4x6.3mm
R42	47k, 1%	TH 2.4x6.3mm
R43	10R, 1%	TH 2.4x6.3mm

Capacitors		
	Value	Case
C1	0.47uF X2 MKP 275V	TH 18x14.5x7.5mm
C2	47uF, 400V, ELKO	TH 26x16mm
C3	100nF	TH 4x4mm
C4	100uF, 35V, ELKO	TH 12x8mm
C5	1nF, 500V	TH ø5 mm
C6	100nF	TH 4x4mm
C7	4.7nF	TH 4x4mm
C8	3.3nF	TH 5x4mm
C9	2.2nF X1 400VAC, 350VAC	TH ø10 mm
C10	2.2nF X1 400VAC, 350VAC	TH ø10 mm
C11	1nF, 500V	TH ø5 mm
C12	1nF, 500V	TH ø5 mm
C13	100uF, 35V, ELKO	TH 12x8mm
C14	1nF, 500V	TH ø5 mm
C15	100uF, 35V, ELKO	TH 12x8mm
C16	100nF	TH 4x4mm
C17	2.2nF	TH 4x4mm
C18	2.2nF	TH 4x4mm
C19	1nF, 500V	TH ø5 mm

Diodes & Transistors		
	Value	Case
V1	1N4007	DO-41
V2	1N4007	DO-41
V3	1N4007	DO-41
V4	1N4007	DO-41
V5	1N4148	DO-35
V6	P5NK80Z	TO-220
V7	UF4002	DO-41
V8	MUR1620CT	TO-220AB
V9	UF4002	DO-41
V10	5V1 Zenner	DO-35
V11	1N4148	DO-35
V12	1N4148	DO-35
V13	1N4148	DO-35
V14	BC546B	TO-92
V15	LED Green	5mm
V16	LED Red	5mm

## BCK2801-969

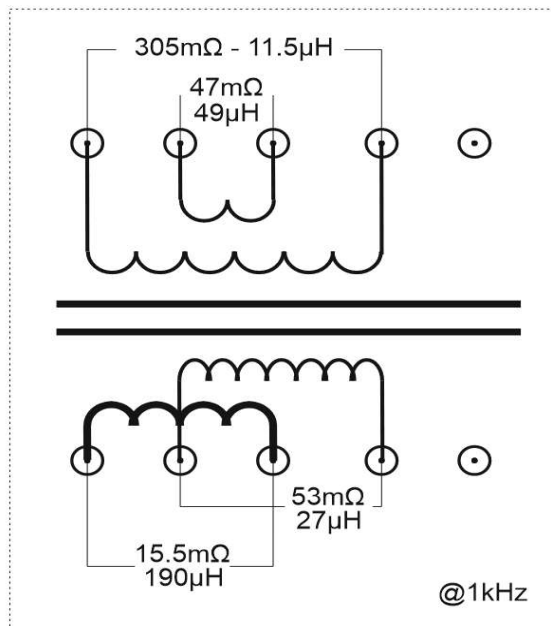

Miscellaneous		
	Value	Case
F1	Fuse T 1.25A	5x20mm
L1	LCL-UU10.5-3036A	
T1	BCK2801-969	
S1	833H-1A-S	19x15x15mm

Integrated Circuits		
	Value	Case
N1	D3842	DIL8
N2	D324 (LM324)	14-DIP
D1	07501952	DIL16
U1	CNY17F-2	DIP-6
N3	TL741	TO-92

\*TH - Through Hole component

**Disclaimer:**

This document contains a list of electronic components for a Bosch charger. Please be aware of the following points:

- **Unofficial and Unverified:** This component list is not an official document from the manufacturer. It has been compiled independently and is not endorsed, verified, or guaranteed by Bosch.
- **Component Measurements:** The values and specifications provided in this list (e.g., resistance, capacitance, inductance) were obtained by measuring components with instruments such as a multimeter, LCR meter, and vernier calipers. These measurements may have a margin of error and might not perfectly match the original manufacturer's specifications.
- **User Responsibility:** The use of this component list is at your own risk. The information is provided for informational and educational purposes only. The creator of this list doesn't assume any responsibility or liability for any errors, omissions, or the consequences of using this information. Any repairs, modifications, or projects undertaken based on this list should be done by qualified individuals with an understanding of electrical safety.

By using this list, you acknowledge and agree that you are fully responsible for your actions and the outcomes of any projects you undertake.